


en 02-2017/03 50110223



Dimensioned drawing

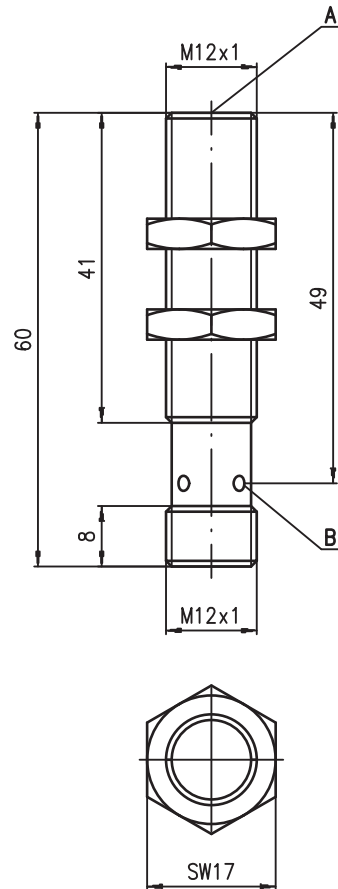

	M12	<i>stainless steel</i> 316 L	6mm
10 - 30 V DC		600 Hz	embedded

- Slim and short cylindrical metal housing M12x1
- V4A / AISI 316L stainless steel housing
- ECOLAB tested
- For food and beverage applications
- Built-in short circuit protection, inductive protection and polarity reversal protection
- LED for switching state visible from 360°




Tightening torque of the fastening nuts < 20Nm !

- A** Active surface
- B** Yellow indicator diode

Electrical connection

M12 connector

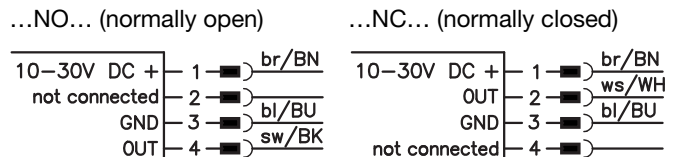

...NO...-S12 (normally open):
...NC...-S12 (normally closed):

3-pin or 4-pin M12 connection cables can be used.
only 4-pin M12 connection cables can be used.

We reserve the right to make changes • DS_IS212E.5F_en_50110223.fm

Accessories:

(available separately)

- M12 connectors (KD ...)
- Ready-made cables (K-D ...)
- Mounting clamp (MC 012...)

Specifications

General specifications

Type of installation
Typ. operating range limit S_n
Operating range S_a

IS 212...-6E0...
embedded installation
6.0mm
0 ... 4.8mm

Electrical data

Operating voltage U_B 1)
Residual ripple σ
Output current I_L
Open-circuit current I_0
Residual current I_r
Switching output/function

10 ... 30VDC
 $\leq 15\%$ of U_B
 ≤ 200 mA
 ≤ 10 mA
 $\leq 100\mu$ A
.../4NO... PNP transistor, make-contact (NO)
.../4NC... PNP transistor, break-contact (NC)
.../2NO... NPN transistor, make-contact (NO)
.../2NC... NPN transistor, break-contact (NC)

Voltage drop U_d
Hysteresis H of S_r
Temperature drift of S_r
Repeatability

≤ 2 V
 $\leq 15\%$
 $\leq 10\%$ 2)
 $\leq 5\%$ 3)

Timing

Switching frequency f
Delay before start-up

600Hz
 ≤ 50 ms

Indicators

Yellow LED (visible from 360°)

switching state

Mechanical data

Housing
Standard surface plate
Active surface
Weight (M12 plug)
Connection type

stainless steel AISI 316L (DIN 1.4404)
18 x 18mm², Fe360
stainless steel AISI 316L (DIN 1.4404)
approx. 80g
M12 connector, 4-pin

Environmental data

Ambient temperature
Protection class
Environmentally tested acc. to
Protective circuit 4)
Standards applied
Electromagnetic compatibility

-25°C ... +85°C
IP 67, IP 68, IP 69K
ECOLAB
1, 2, 3
IEC/EN 60947-5-2
IEC 60255-5
IEC 61000-4-2
IEC 61000-4-3
IEC 61000-4-4
UL 508, CSA C22.2 No.14-13 1) 5)

1 kV
Level 3 air 8kV (ESD)
Level 3 10V/m (RFI)
Level 3 2kV (Burst)

Certifications

- 1) Observe the safety regulations and installation instructions regarding power supply and wiring; for UL applications: only for use in "Class 2" circuits acc. to NEC
- 2) Over the entire operating temperature range
- 3) For $U_B = 20 \dots 30$ VDC, ambient temperature $T_a = 23^\circ\text{C} \pm 5^\circ\text{C}$
- 4) 1=polarity reversal protection, 2=short circuit protection, 3=inductive protection for all outputs
- 5) These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Order guide

The sensors listed here are preferred types; current information at www.leuze.com.

$S_n = 6$ mm	Designation	Part No.
	IS 212 FM/4NO.5F-6E0-S12	501 09736

Tables

Reduction factors for surface plates made of:
for $S_n = 6.0$ mm

Steel Fe360	1
Copper	0.85
Aluminum	1.00
Brass	1.30
Stainless steel (0.9 ¹⁾)	


Reduction factors for installation in:
for $S_n = 6.0$ mm

Steel Fe360	0.7
Aluminum	1.15
Brass	1.05
Stainless steel	0.80

1) Surface plate min. 2mm thick

Mounting


Embedded installation:

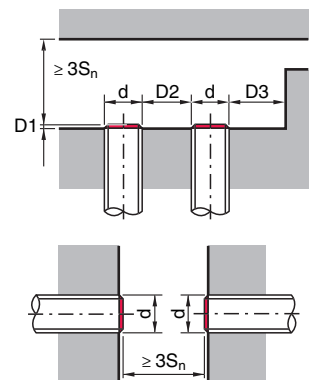

Ferromagnetic and non-ferromagnetic materials			
S_n [mm]	D1 [mm]	D2 [mm]	D3 [mm]
6.0	0	38.0	6.0

Diagrams

Models with $S_n = 6.0$ mm

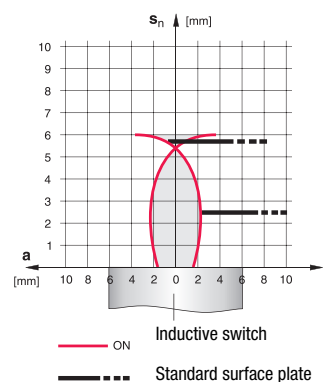

Remarks

Operate in accordance with intended use!

- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with the intended use.

Type key

I	S	2	1	2	F	M	/	4	N	0	.	5	F	-	6	E	0	-	S	1	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Operating principle / construction

IS Inductive switch / Standard

Series

212 series with M12 x 1 external thread

Housing / thread

FM Full metal housing (active surface: stainless steel AISI 316L) / metric thread

Output function

4NO PNP transistor, make-contact (NO)

4NC PNP transistor, break-contact (NC)

2NO NPN transistor, make-contact (NO)

2NC NPN transistor, break-contact (NC)

Special equipment

5F Food version

Measurement range / type of installation

6E0 typ. scan range limit 6.0mm / embedded installation

Electrical connection

S12 M12 connector, 4-pin, axial

